ANTALYA AVS FAN
MÜHENDİSLİK ISITMA SOĞUTMA HAVALANDIRMA
SAN. TİC. LTD.ŞTİ





AVS-HPF

HÜCRELİ PLUG FANLAR


CELLULAR PLUG FANS

Hücreli Plug Fanlar, fan ve ekipmanların yalıtımlı bir hücre içerisinde konumlandırıldığı, kanal bağlantısına ihtiyaç duymadan çalışabilen havalandırma çözümleridir. Kompakt tasarımı sayesinde dar alanlarda dahi kolay uygulama imkânı sunar. Düşük ses seviyesi ve dengeli hava akışı ile özellikle konfor şartlarının önemli olduğu alanlarda tercih edilir. Otel, hastane, ofis, alışveriş merkezi ve endüstriyel tesislerde taze hava besleme ve egzoz uygulamalarında etkin çözümler sağlar.

Cellular plug fans house the fan and equipment in an insulated cabinet and can operate without duct connection. Their compact design allows easy installation even in tight spaces. With low noise and balanced air flow they are preferred where comfort matters, for fresh air supply and exhaust in hotels, hospitals, offices, shopping centres and industrial plants.

TİP/KOD *Type / Code*	Voltaj *Voltage* (V)	Frekans *Frequency* (Hz)	Güç *Power* (kW)	Devir *Speed* (d/d)	Maks. Debi *Max. Flow* (m^3/h)	Maks. Basınç Kaybı *Max. Pressure* (Pa)	Ses *Sound* (dB(A))	Ağırlık *Weight* (kg)
AVS-HPF-0,75	380	50	0,75	1.410	2.500	450	72	55
AVS-HPF-1,10	380	50	1,10	1.430	4.000	600	75	66
AVS-HPF-1,50	380	50	1,50	1.430	6.000	600	76	74
AVS-HPF-2,20	380	50	2,20	1.435	8.000	750	79	77
AVS-HPF-3,00	380	50	3,00	1.435	10.000	750	80	90
AVS-HPF-4,00	380	50	4,00	1.455	12.000	800	82	100
AVS-HPF-5,50	380	50	5,50	1.465	18.000	750	83	108
AVS-HPF-7,50	380	50	7,50	1.465	20.000	900	86	108
AVS-HPF-11,00	380	50	11,00	1.465	25.000	1.000	90	110

TEKNİK RESİM / *TECHNICAL DRAWING*

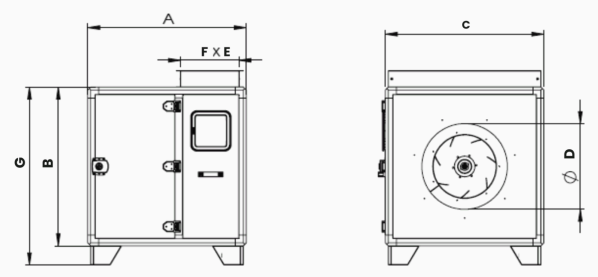

TİP/KOD *Type / Code*	Ölçüler *Sizes* (mm)						
	A	B	C	D	E	F	G
AVS-HPF-0,75	670	670	670	250	590	230	770
AVS-HPF-1,10	720	720	720	350	670	270	820
AVS-HPF-1,50	720	720	720	350	640	270	820
AVS-HPF-2,20	820	820	820	400	740	300	920
AVS-HPF-3,00	870	870	870	450	790	320	970
AVS-HPF-4,00	870	870	870	450	790	320	970
AVS-HPF-5,50	970	970	970	500	890	335	1.070
AVS-HPF-7,50	970	970	970	600	890	400	1.070
AVS-HPF-11,00	970	970	970	660	890	400	1.070



AVS-SKF

SIKKANAT HÜCRELİ VANTİLATÖRLER


CELLULAR FANS WITH CLOSELY SPACED BLADES

Sıkkanat Hücreli Vantilatörler, kanat aralıkları dar tasarlanmış fan yapısı sayesinde yüksek statik basınç gerektiren sistemlerde etkin performans sunar. Fan bileşenleri, yalıtımlı hücre içerisinde konumlandırılarak daha dengeli ve güvenli çalışma sağlanır. Uzun kanal hatları, filtreli sistemler ve basınç kaybının yüksek olduğu uygulamalarda tercih edilir. Endüstriyel tesisler, ticari yapılar ve genel havalandırma uygulamalarında güvenilir ve sürekli çalışmaya uygun çözümler sunar.

Cellular fans with closely spaced blades perform effectively in systems requiring high static pressure. The fan components are placed in an insulated cabinet for balanced and safe operation. They are preferred for long duct runs, filtered systems and applications with high pressure loss in industrial, commercial and general ventilation.

TİP/KOD *Type / Code*	Fan Tipi *Fan Type*	Voltaj *Voltage* (V)	Frekans *Frequency* (Hz)	Güç *Power* (kW)	Devir *Speed* (d/d)	Maks. Debi *Max. Flow* (m³/h)	Maks. Basınç Kaybı *Max. Pressure* (Pa)	Ağırlık *Weight* (kg)	Ses *Sound* (dB(A))
AVS-SKF-280-1,50	SYG-280	380	50	1,50	2.880	5.500	400	79	68
AVS-SKF-280-2,20	SYG-280	380	50	2,20	2.880	6.500	450	85	69
AVS-SKF-315-2,20	SYG-315	380	50	2,20	2.880	7.500	450	90	70
AVS-SKF-315-3,00	SYG-315	380	50	3,00	2.880	8.500	500	99	71
AVS-SKF-355-3,00	SYG-355	380	50	3,00	2.880	10.000	425	104	73
AVS-SKF-355-4,00	SYG-355	380	50	4,00	2.880	11.500	375	130	73
AVS-SKF-400-4,00	SYG-400	380	50	4,00	2.880	13.000	400	133	78
AVS-SKF-450-5,50	SYG-450	380	50	5,50	2,900	14.500	500	148	75
AVS-SKF-450-5,50	SYG-450	380	50	5,50	1.465	16.000	500	154	77
AVS-SKF-450-7,50	SYG-450	380	50	7,50	1.465	18.500	600	190	79
AVS-SKF-500-7,50	SYG-500	380	50	7,50	1.465	21.000	500	196	70
AVS-SKF-500-11,00	SYG-500	380	50	11,00	1.470	25.000	500	203	74

TEKNİK RESİM / *TECHNICAL DRAWING*

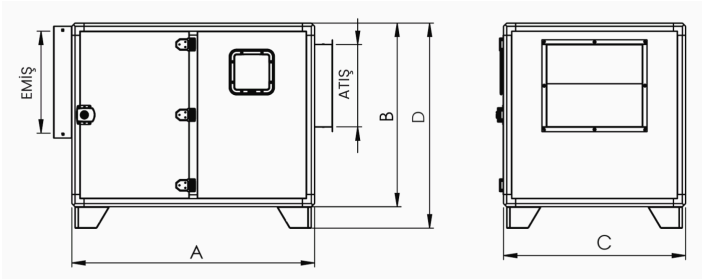

TİP/KOD *Type / Code*	Ölçüler *Sizes* (mm)							
	A	B	C	D	Emiş 1	Emiş 2	Atış 1	Atış 2
AVS-SKF-280	1.000	750	750	850	670	380	360	360
AVS-SKF-315	1.100	850	850	950	770	430	400	400
AVS-SKF-355	1.100	900	900	1.000	820	430	450	450
AVS-SKF-400	1.380	1.000	1.000	1.100	920	500	500	500
AVS-SKF-450	1.540	1.100	1.100	1.200	1.020	600	560	560
AVS-SKF-500	1.540	1.240	1.240	1.340	1.160	600	630	630

AVS-HSK



KAYIŞ KASNAKLI SIK KANATLI HÜCRELİ ASPİRATÖR


BELT DRIVEN CELLULAR FAN, FORWARD CURVED BLADES

HSK çift emişli santrifüj hücreli fanlar 2.500 m³/h ile 50.000 m³/h debileri arasında değişik boyutlarda üretilmektedir. Hücre panelleri 25 mm kalınlıkta cam yünü izolelidir. Titreşimsiz çalışma özelliğine sahip olup düşük enerji ile maksimum verim sağlarlar.

HSK double inlet centrifugal cellular fans are produced in various sizes for air flows between 2,500 m³/h and 50,000 m³/h. Cabinet panels are insulated with 25 mm glass wool. They run free of vibration and deliver maximum efficiency with low energy.

TİP/KOD *Type / Code*	Fan Tipi *Fan Type*	Voltaj *Voltage* (V)	Frekans *Frequency* (Hz)	Güç *Power* (kW)	Devir *Speed* (d/d)	Maks. Debi *Max. Flow* (m³/h)	Maks. Basınç Kaybı *Max. Pressure* (Pa)	Ağırlık *Weight* (kg)	Ses *Sound* (dB(A))
AVS-HSK-07-0,75	SKHF-07/07	380	50	0,75	1.410	2.500	380	69	57
AVS-HSK-07-1,10	SKHF-07/07	380	50	1,10	1.430	3.500	380	75	60
AVS-HSK-09-1,10	SKHF-09/09	380	50	1,10	1.430	4.500	350	80	59
AVS-HSK-09-1,50	SKHF-09/09	380	50	1,50	1.430	5.000	400	89	60
AVS-HSK-10-1,50	SKHF-10/10	380	50	1,50	1.430	6.000	410	94	62
AVS-HSK-10-2,20	SKHF-10/10	380	50	2,20	1.435	7.000	400	120	61
AVS-HSK-12-2,20	SKHF-12/12	380	50	2,20	1.435	8.500	400	123	63
AVS-HSK-12-3,00	SKHF-12/12	380	50	3,00	1.435	10.000	410	138	63
AVS-HSK-15-3,00	SKHF-15/15	380	50	3,00	1.435	12.000	410	144	65
AVS-HSK-15-4,00	SKHF-15/15	380	50	4,00	1.455	14.000	300	180	62
AVS-HSK-18-5,50	SKHF-18/18	380	50	5,50	1.465	18.000	310	186	64
AVS-HSK-18-7,50	SKHF-18/18	380	50	7,50	1.465	20.000	310	193	66

TEKNİK RESİM / *TECHNICAL DRAWING*

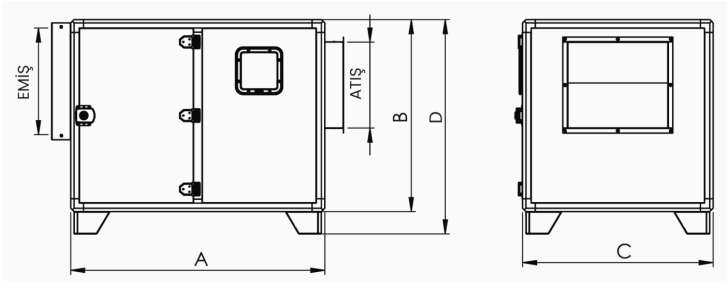

TİP/KOD *Type / Code*	Ölçüler *Sizes* (mm)							
	A	B	C	D	Emiş 1	Emiş 2	Atış 1	Atış 2
AVS-HSK-07/07	850	580	580	680	500	200	222	232
AVS-HSK-09/09	950	700	700	800	620	250	260	300
AVS-HSK-10/10	1.050	750	750	850	670	350	335	290
AVS-HSK-12/12	1.100	850	850	950	770	400	400	340
AVS-HSK-15/15	1.200	900	900	1.000	820	500	473	403
AVS-HSK-18/18	1.240	1.000	1.000	1.100	920	550	555	480



AVS-HPLF

FİLTRELİ HÜCRELİ PLUG FAN


CELLULAR PLUG FAN WITH METAL CASSETTE FILTER

HPLF tek emişli santrifüj hücreli fanlar 2.500 m³/h ile 50.000 m³/h debileri arasında değişik boyutlarda üretilmektedir. Hücre panelleri 20 mm kalınlıkta ve 70 kg/m³ yoğunlukta kaya yünü izolelidir. Mutfak, davlumbaz vb. yağlı hava içerebilecek mahallerin havalandırılması için en uygun çözümdür. İçerisinde G2 metal kaset filtre mevcuttur.


HPLF single inlet centrifugal cellular fans are produced in various sizes for air flows between 2,500 m³/h and 50,000 m³/h. Cabinet panels are insulated with 20 mm, 70 kg/m³ rock wool. They are the most suitable solution for ventilating kitchens, hoods and other spaces with oily air. A G2 metal cassette filter is included.

TİP/KOD *Type / Code*	Voltaj *Voltage* (V)	Frekans *Frequency* (Hz)	Güç *Power* (kW)	Devir *Speed* (d/d)	Maks. Debi *Max. Flow* (m³/h)	Maks. Basınç Kaybı *Max. Pressure* (Pa)	Ses *Sound* (dB(A))	Ağırlık *Weight* (kg)
AVS-HPLF-0,75	380	50	0,75	1.410	2.500	450	72	55
AVS-HPLF-1,10	380	50	1,10	1.430	4.000	600	75	66
AVS-HPLF-1,50	380	50	1,50	1.430	6.000	600	76	74
AVS-HPLF-2,20	380	50	2,20	1.435	8.000	750	79	77
AVS-HPLF-3,00	380	50	3,00	1.435	10.000	750	80	90
AVS-HPLF-4,00	380	50	4,00	1.455	12.000	800	82	100
AVS-HPLF-5,50	380	50	5,50	1.465	18.000	750	83	108
AVS-HPLF-7,50	380	50	7,50	1.465	20.000	900	86	108
AVS-HPLF-11,00	380	50	11,00	1.465	25.000	1.000	90	110

TEKNİK RESİM / *TECHNICAL DRAWING*

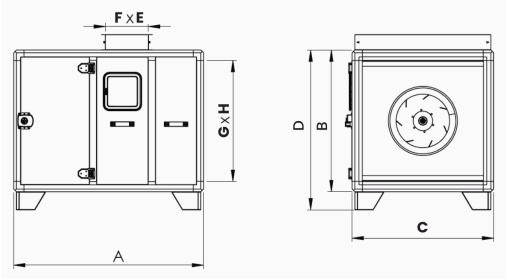

TİP/KOD *Type / Code*	Ölçüler *Sizes* (mm)							
	A	B	C	D	E	F	G	H
AVS-HPLF-0,75	900	670	670	770	230	590	590	590
AVS-HPLF-1,10	900	720	720	820	270	640	640	640
AVS-HPLF-1,50	1.000	720	720	820	270	640	640	640
AVS-HPLF-2,20	1.100	820	820	920	300	740	740	740
AVS-HPLF-3,00	1.100	870	870	970	320	790	790	790
AVS-HPLF-4,00	1.250	870	870	970	320	790	790	790
AVS-HPLF-5,50	1.350	970	970	1.070	335	890	890	890
AVS-HPLF-7,50	1.350	970	970	1.070	400	890	890	890
AVS-HPLF-11,00	1.350	970	970	1.070	400	890	890	890

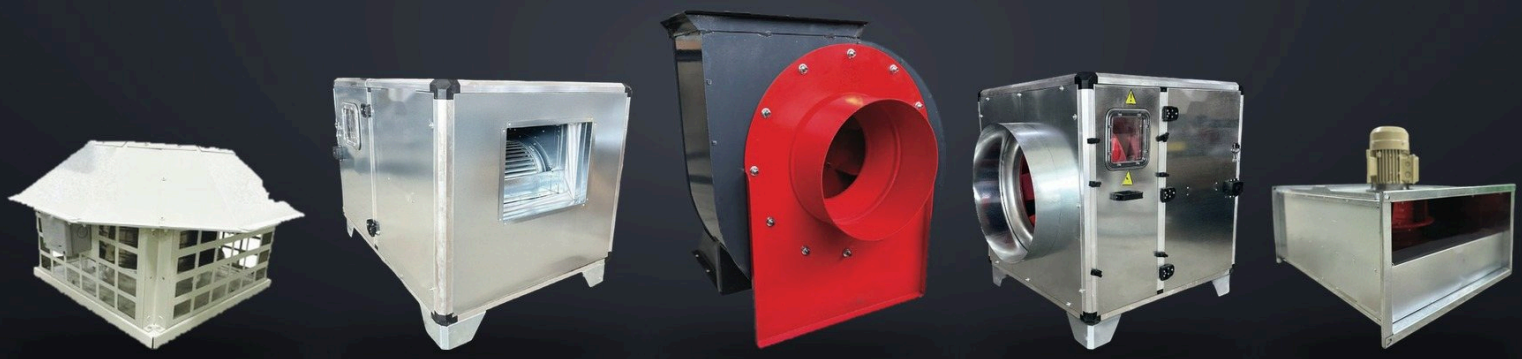

ANTALYA AVS FAN
MÜHENDİSLİK ISITMA SOĞUTMA HAVALANDIRMA
SAN. TİC. LTD.ŞTİ

Projenizi anlatın, hesabı birlikte çıkaralım.

Ürünler projeye göre imal edilir. Fiyat ve teslim süresi ölçü ve adete göre teklifle verilir.

Telefon ve WhatsApp	+90 543 695 64 13
E-posta	info@antalyaavsfan.com
Web	antalyaavsfan.com
Adres	Gaziler Mah. 249. Sok. Antalya Küçük Esnaf Sanayi Sitesi No:1/E 07550 Kepez / Antalya
Çalışma saati	Pazartesi - Cuma 08:00-18:00
Hizmet bölgesi	Antalya, Burdur, Isparta

AVS FAN